
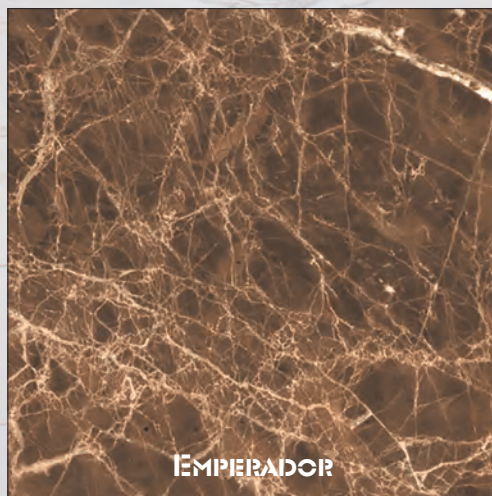
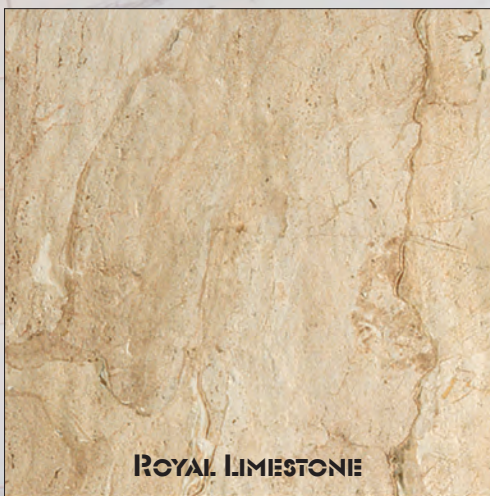
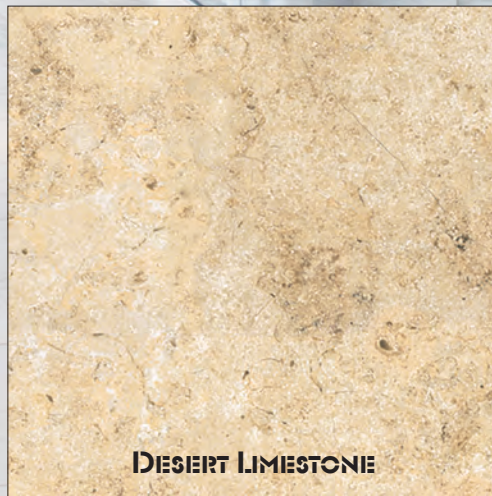


# AMERICAN DESTINATIONS

## THE MARBLE COLLECTION

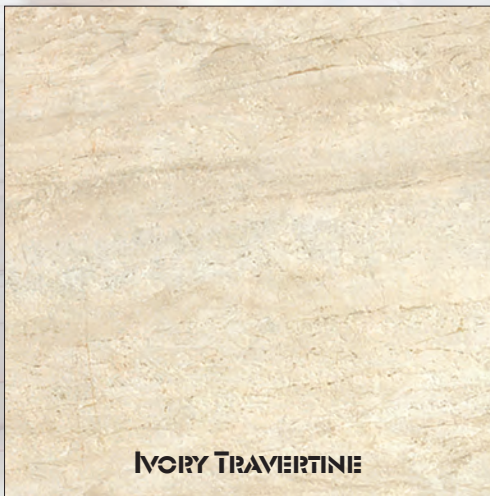

STATUARY 12x24"

# AMERICAN DESTINATIONS

American Destinations is an Italian engineered, rectified, porcelain that is made in the US.

The Marble Collection utilizes their rectified tile with a new digital glazing technology that makes it possible to eliminate repeating patterns, which allows a true, high resolution, marble effect.

The durable composition makes it ideal for commercial high traffic areas.

Colors: Desert Limestone\* (*Matte Only*), Emperador\*, Ivory Travertine, Marfil, Royal Marble & Statuary

Sizes: 3x6", 6x6", 12x12", 12x24", 18x18" & 3x12" Bullnose - Available in all sizes unless otherwise noted with an (\*)

Thickness: Approximately 3/8"

Finishes: Matte, Polished

Lead Time: Two week Average

Usage: Commercial, Residential & Water Applications

[www.ctmdealer.com](http://www.ctmdealer.com)

## The Marble Collection

C1028 Acutest  
COF DCOF  
Dry ≥ 0.80 Wet ≥ 0.42  
Wet ≥ 0.60

PHYSICAL PROPERTIES	TEST	INDUSTRY STANDARDS	US RESULTS COLORED BODY
Water Absorption	ASTM C373	1.5% Maximum	≤ 0.1%
Size			
Calibrated (non rectified)	ASTM C499	• Range of Thickness (inch) 0.040	≤ 0.040
	ASTM C499	• Average Facial Dimension ± 0.50%	≤ ± 0.50%
	ASTM C485	• Warpage ± 0.75% on any edge	≤ ± 0.75%
	ASTM C485	• Warpage ± 0.75% on any edge	≤ ± 0.50%
	ASTM C502	• Wedging ± 0.50%	≤ ± 0.50%
Rectified	ASTM C499	• Range of Thickness 0.040	≤ 0.040%
	ASTM C499	• Average Facial Dimension ± 0.25%	≤ 0.25%
	ASTM C485	• Warpage ± 0.40% on any edge	≤ 0.40%
	ASTM C485	• Warpage ± 0.40% on diagonal	≤ 0.40%
	ASTM C502	• Wedging ± 0.25%	≤ 0.25%
Bond Strength	ASTM C482	50 psi or greater	> 200 psi
Deep Abrasion	ASTM C1243	< 175 mm <sup>3</sup>	< 150 mm <sup>3</sup>
Hardness (Mohs scale)		No requirement	≥ 7
Frost Resistance (Freeze/Thaw)	ASTM C1026	No sample must show alterations to surface	No Cracking or spalling occurred
Chemical Resistance	ASTM C650	No requirement	Class A
Breaking Strength	ASTM C648	250 lbf or greater	≥ 350 lbf
Coefficient of Friction (Static)	ASTM C1028	No requirement	Per collection