

AMERICAN DESTINATIONS


THE NEIGHBORHOODS COLLECTION




ARLINGTON HEIGHTS



BRIGHTON CENTER

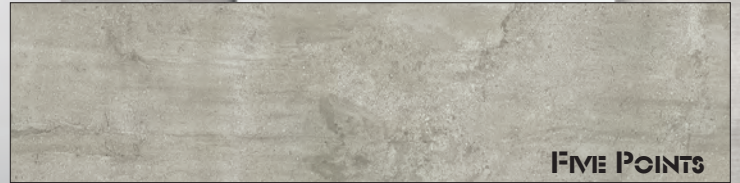

FIVE POINTS

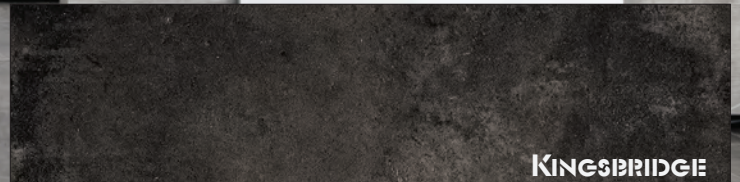

KINGSBRIDGE

KINGSBRIDGE HONED (FLOOR)
BRIGHTON CENTER (WALL) 18x36"



AMERICAN DESTINATIONS

American Destinations is an Italian engineered, rectified, porcelain that is made in the US.

The Neighborhoods Collection utilizes a new digital glazing technology that makes it possible to eliminate repeating patterns, which allow for a true, high resolution concrete effect. The durable composition makes it ideal for commercial high traffic areas.

Colors: Arlington Heights, Brighton Center, Five Points, Kingsbridge

Sizes: 6x36", 18x36", 12x24", 24x24", 3x24" Bullnose (*Matte Only*) & 6x12" Cove Base (*Matte Only*)

Thickness: Approximately 3/8"

Finishes: Matte, Ribbed

Lead Time: Two week Average

Usage: Commercial, Residential & Water Applications

www.ctmdealer.com

The Neighborhoods Collection

C1028
COF
Dry ≥ 0.80
Wet ≥ 0.60

Acutest
DCOF
Wet ≥ 0.42

PHYSICAL PROPERTIES	TEST	INDUSTRY STANDARDS	US RESULTS COLORED BODY
Water Absorption Size Calibrated (non rectified)	ASTM C373	1.5% Maximum	≤ 0.1%
Rectified	ASTM C499	• Range of Thickness (inch) 0.040	≤ 0.040
	ASTM C499	• Average Facial Dimension ± 0.50%	≤ ± 0.50%
	ASTM C485	• Warpage ± 0.75% on any edge	≤ ± 0.75%
	ASTM C485	• Warpage ± 0.75% on any edge	≤ ± 0.50%
	ASTM C502	• Wedging ± 0.50%	≤ ± 0.50%
Bond Strength	ASTM C499	• Range of Thickness 0.040	≤ 0.040%
	ASTM C499	• Average Facial Dimension ± 0.25%	≤ 0.25%
	ASTM C485	• Warpage ± 0.40% on any edge	≤ 0.40%
	ASTM C485	• Warpage ± 0.40% on diagonal	≤ 0.40%
Deep Abrasion	ASTM C502	• Wedging ± 0.25%	≤ 0.25%
Hardness (Mohs scale)	ASTM C482	50 psi or greater	> 200 psi
Frost Resistance (Freeze/Thaw)	ASTM C1243	< 175 mm ³	< 150 mm ³
Chemical Resistance	ASTM C1026	No requirement	≥ 7
	ASTM C1026	No sample must show alterations to surface	No Cracking or spalling occurred
	ASTM C1026	No requirement	Class A
Breaking Strenght	ASTM C650	250 lbf or greater	≥ 350 lbf
Coefficient of Friction (Static)	ASTM C648	No requirement	Per collection
	ASTM C1028		